



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B60R 21/24	A1	(11) International Publication Number: WO 98/12077 (43) International Publication Date: 26 March 1998 (26.03.98)
--	-----------	--

(21) International Application Number: PCT/US97/16587

(81) Designated States: CA, JP, KR.

(22) International Filing Date: 18 September 1997 (18.09.97)

Published
With international search report.

(30) Priority Data:


9619747.0	21 September 1996 (21.09.96)	GB
761,179	6 December 1996 (06.12.96)	US

(71) Applicant: BREED AUTOMOTIVE TECHNOLOGY, INC.
[US/US]; P.O. Box 33050, Lakeland, FL 33807-3050 (US).(72) Inventor: HAIDAR, Raf; 24 Holt Avenue, Bishops Tachbrook,
Leamington Spa CV33 9RE (GB).(74) Agent: DRAYER, Lonnie, R.; Breed Automotive Technology,
Inc., P.O. Box 33050, Lakeland, FL 33807-3050 (US).

(54) Title: APPARATUS FOR PROTECTING A VEHICLE OCCUPANT

(57) Abstract

An inflatable airbag (10) has two inflation chambers (16, 18) communicating with one another via a passageway (20). A source of inflation gas (22) provides inflation gas only into one of the inflation chambers. When the airbag is deployed one of the inflation chambers (16) is completely inflated before the other inflation chamber (18) is completely inflated. The apparatus has special utility in the event a vehicle experiences a side impact or rollover.

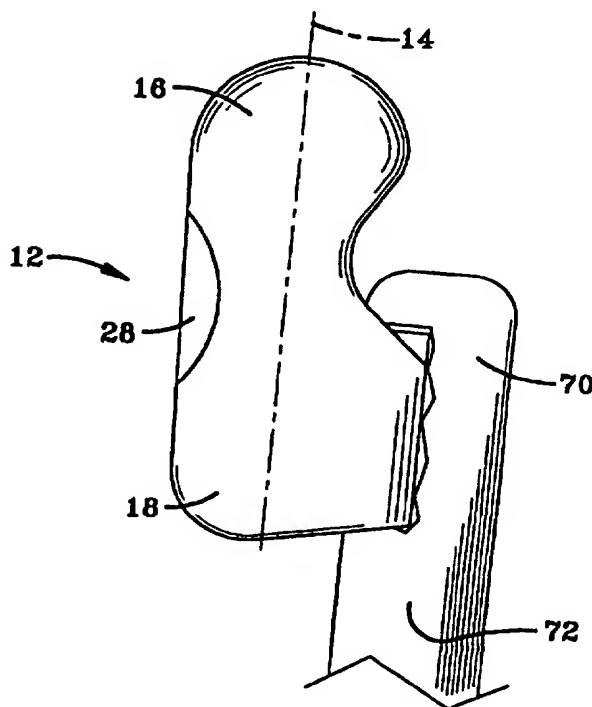

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

APPARATUS FOR PROTECTING A VEHICLE OCCUPANT

The present invention relates generally to an inflatable apparatus for protecting a vehicle
5 occupant, and more specifically to an airbag for protecting a vehicle occupant in the event that the vehicle is involved in a side impact type of collision.

In the event that a vehicle is involved in a
10 collision where it is struck from the side there is very little time from the sensing of a side impact until a vehicle occupant may collide with a door or side window of a vehicle. It is common for a vehicle occupant to be secured by a lap belt and shoulder
15 harness, or a belt device which is a composite lap belt and shoulder harness. With respect to persons in the front seat(s) of a vehicle the shoulder harness is often anchored above the vehicle occupant's shoulder on a pillar located at the rear edge of the front door
20 of the vehicle. The deployment of an airbag into a space between a vehicle seat and a vehicle door, to provide a cushioning effect to a vehicle occupant's thorax and head without interference from a shoulder harness anchored to a structural pillar in such a
25 manner presents a challenge. The protective apparatus disclosed herein meets and overcomes this challenge.

The airbag employed in the practice of the present invention has two inflation chambers which are connected by an open passageway. Inflation gas is
30 introduced directly into only one of the inflation chambers. The lower inflation chamber, into which the inflation gas is introduced and is fully inflated before the upper inflation chamber is fully inflated,

will be struck first by the body of the sideways moving vehicle occupant, causing inflation gas to move into the upper inflation chamber as the lower inflation chamber cushions the impact of the body with the vehicle interior. The vehicle occupant's head then strikes the fully inflated upper inflation chamber and the impact of the head with the vehicle interior is cushioned.

There is provided in accordance with one aspect of the present invention an apparatus for protecting a vehicle occupant comprising: (a) an inflatable airbag having a first inflation chamber which has a first volume and a second inflation chamber having a second volume which is less than said first volume, said first and second chambers communicating with one another via a passageway; and (b) a source of inflation gas which provides inflation gas only into said first inflation chamber, said first inflation chamber being completely inflated before said second inflation chamber is completely inflated.

There is provided in accordance with another aspect of the present invention a vehicle seat having such an apparatus incorporated therein, preferably in the backrest and deployable through a lateral side of the backrest.

There is provided in accordance with yet another aspect of the invention an apparatus for protecting a vehicle occupant comprising an airbag which is deployed through a lateral side of a seat backrest such that the airbag is not interfered with by a shoulder harness anchored on a pillar even though the

airbag when deployed is horizontally aligned with the shoulder harness and located both above and below the shoulder harness.

BRIEF DESCRIPTION OF THE DRAWINGS

The features of the invention which are believed to be novel are set forth with particularity in the appended claims. The present invention, both as to its structure and manner of operation, may best be understood by referring to the following detailed description, taken in accordance with the accompanying drawings in which:

Fig. 1 is a schematic representation of a side view of an airbag which is employed in an apparatus for protecting a vehicle occupant in accordance with one embodiment of the present invention;

Fig. 2 is a schematic representation of a side view of an airbag which is employed in an apparatus for protecting a vehicle occupant in accordance with another embodiment of the present invention;

Fig. 3 is a schematic view of a first step in folding a airbag for use in a preferred embodiment of an apparatus for protecting a vehicle occupant in accordance with the present invention;

Fig. 4 is a schematic view of a second step in folding a airbag for use in a preferred embodiment of an apparatus for protecting a vehicle occupant in accordance with the present invention;

Fig. 5 is a schematic representation of the step of securing the folded airbag in the folded configuration by placing the folded airbag in a container;

Fig. 6 is a schematic representation of the step of securing the folded airbag in the folded

configuration by placing a frangible band or wrap around the folded airbag;

Fig. 7 is a schematic representation of the step of securing placing a frangible band or wrap around
5 the folded airbag and thereafter placing the airbag in a container;

Fig. 8 is a schematic representation of the step of securing the folded airbag in the folded configuration by placing the airbag in a container and
10 thereafter placing a frangible band or wrap around the folded airbag and container;

Fig. 9 is a schematic representation of top view of a vehicle seat having an airbag situated in the backrest;

15 Fig. 10 is a schematic side elevation view of a vehicle seat with an airbag in a first stage of deployment from the backrest;

Fig. 11 is a schematic side elevation view of a vehicle seat with an airbag in a second stage of
20 deployment from the backrest; and,

Fig. 12 is a schematic side elevation view of a vehicle seat with an airbag in a third stage of deployment from the backrest.

DETAILED DESCRIPTION OF THE INVENTION

Referring first to Figs. 1 and 2 there are shown schematic side elevation views of alternative
5 embodiments of airbags 10,12 used in the practice of
the present invention in a flat, unfolded and
uninflated state. Like parts in the embodiments will
be identified with the same reference numeral. In
each of the exemplary embodiments the airbag which has
10 a longitudinal axis 14, the maximum length of the
airbag measured parallel to said longitudinal axis
being greater than the maximum width of the airbag
measured perpendicular to said longitudinal axis. In
each of the exemplary embodiments the inflatable
15 airbag has a first inflation chamber 16 with a first
volume and a second inflation chamber 18 with a second
volume. The volume of the second inflation chamber 18
is less than the volume of the first inflation chamber
16. Preferably the ratio of the volume of the first
20 inflation chamber to the volume of the second
inflation chamber is in the range of about ten to six
to about twelve to eight. A prototype airbag having
this structure has been made in which the volume of
the first inflation chamber 16 is about ten liters and
25 the volume of the second inflation chamber 18 is about
seven liters. The two inflation chambers communicate
with one another via an open passageway 20. In the
prototype airbag the open passageway 20 between the
two inflation chambers had a diameter of about thirty
30 millimeters. However, the time delay between the
complete inflation of the first inflation chamber and

the complete inflation of the second inflation chamber may be changed by changing the size of the open passageway between the two inflation chambers.

5 The airbag may be made of any suitable woven material such as a nylon fabric, or any suitable nonwoven film selected in accordance with good engineering practices. For example, a prototype airbag of the exemplary embodiments of Fig. 2 has been manufactured simply by sewing two layers of woven
10 nylon fabric into the structure disclosed herein.

 A source of inflation gas 22,24 provides inflation gas only into the first inflation chamber 16 such that the first inflation chamber is completely inflated before the second inflation chamber is
15 completely inflated. Most preferably the volume of the inflation gas provided by the source of inflation gas is a third volume, which is less than the sum of the volumes of the first and second inflation chambers. Put another way, preferably the volume of
20 the inflation gas provided by the source of inflation gas is a third volume with the sum of the first and second volumes being greater than the third volume, and most preferably the volume of inflation gas provided to the airbag is greater than the volume of
25 the first, or larger, inflation chamber. For example, the prototype airbag referred to above was provided with only about twelve to fifteen liters of inflation gas while the sum of the volumes of the two inflation chambers was about seventeen liters.

30 The source of inflation gas may be any suitable airbag inflator, of which many are well known in the

airbag art. The source of inflation gas may be a pyrotechnic inflator, a stored gas inflator or a hybrid of the these types of inflators. The airbag has an inflation gas receiving section 26 for
5 receiving gas directly only into one of the inflation chambers. In the airbag shown in Fig. 1 the source of inflation gas 22 is located totally exterior of the airbag, while the airbag shown in Fig. 2 has the source of inflation gas 24 located at least partially
10 on the interior of the airbag. The choice of location and type of the source of inflation gas should be made by an engineer based upon several factors including the space available for installing the safety device in a vehicle, the temperature of any chemical reaction
15 which creates the inflation gas, the airbag material employed and so forth.

Although one skilled in the art of airbag design will readily recognize that the shapes of the first and second inflation chambers, and the size of the
20 passageway therebetween, may vary while functioning in the intended manner disclosed herein, the preferred embodiments shown in Figs. 1 and 2 have an exterior surface of the first inflation chamber 16 connected to an exterior surface of the second inflation chamber 18
25 by a flexible web 28 to provide stability to the inflated airbag. The flexible web may comprise the same material as the inflation chambers, or any other suitable material. If the airbag will be deployed in a location where it will not potentially be interfered
30 with by a shoulder harness, a second flexible web 30 may connect the exterior surfaces of the first and

second inflation chambers at a side of the airbag opposite the first flexible web 28, as illustrated in Fig. 1. However, if the airbag will be deployed in a location where it will potentially be interfered with by a shoulder harness at a side of the airbag opposite the flexible web 28 the exterior surfaces of said first and second inflation chambers 16,18 are separated from one another by a void 32 as shown in Fig. 2.

In a preferred embodiment of the present invention the airbag is folded into a configuration for storage and eventual deployment by first arranging the airbag in a flat unfolded condition as shown in Figs. 1 and 2.

Referring next to Fig. 3 in conjunction with Figs. 1 and 2(b) the airbag is folded into a plurality of juxtaposed accordion pleats 40 which extend substantially parallel to the longitudinal axis 14 of the airbag. Fig. 3 is a schematic representation of an end or cross-sectional view of the juxtaposed accordion pleats 40 resulting from this step, which is referred to herein and in the claims as one layer 42 of accordion pleats. The product of this step has a first end 44 and a second end 46 which are best seen in Fig. 4 which is a schematic view of a side elevation view of the completely folded airbag. These first and second ends correspond to the lower 44 and upper 46 ends of the airbag as shown in Figs. 1 and 2.

Next the airbag is folded back upon itself from the first end 44 to form a first portion 48 of a final folded length 50 of the airbag. The first portion of

the final folded length of the airbag has only two layers of accordion pleats and has a length comprising less than one half of the final folded length of the airbag. The inflation gas receiving section 26 of the
5 airbag is located in the first portion of the final folded length of the airbag.

Next the airbag back is folded back upon itself from the second end 46 to form a second portion 52 of a final folded length 50 of the airbag. The second
10 portion of the final folded length of the airbag has at least four layers of accordion pleats with the second end 46 of the airbag tucked between two of said layers of accordion pleats. The first and second portions 48, 52 of the final folded length of the
15 airbag are in abutting and non overlapping relationship to one another.

Preferably the folded airbag is maintained in the preferred configuration by any of several methods such as those shown in Figs. 5 through 8. Fig. 5 is a
20 schematic representation of the step of securing the folded airbag 12 in the folded configuration by placing the folded airbag in a closed container 54. It should be noted that if a closed container is used for this purpose one side 56 of the closed container
25 must be designed to break open during airbag deployment to allow the airbag to escape therefrom when it is being inflated.

Fig. 6 is a schematic representation of the step of securing the folded airbag 12 in the folded
30 configuration by placing frangible bands 58 or a frangible wrap (not shown) around the folded airbag.

Fig. 7 is a schematic representation of the step of securing placing a frangible band 58 or wrap (not shown) around the folded airbag 12 and thereafter placing the airbag in an open container 60.

5 Fig. 8 is a schematic representation of the step of securing the folded airbag 12 in the folded configuration by placing the airbag 12 in an open container 60 and thereafter placing a frangible wrap 62 around the folded airbag and container.

10 Referring next to Fig. 9 there is shown a schematic representation of top view of a vehicle seat 66. The vehicle seat has a seat cushion 68 and a backrest 70 with an apparatus for protecting a vehicle occupant, which as disclosed herein includes an
15 airbag, being incorporated in the backrest and deployable through a lateral side 72 of the backrest. The vehicle seat 66 is in close proximity to a door 74 or other structural member of the vehicle interior. The airbag is incorporated into the backrest 70 such
20 that when deployed it will exit the lateral side of the backrest at an angle α which is about 20° from the direction of travel of the vehicle as indicated by the arrow 76 in Fig. 9.

Fig. 10 is a schematic side elevation view of a
25 vehicle seat 66 with an airbag during a first stage of airbag deployment. The source of inflation gas provides inflation gas only into the first inflation chamber 16 of the airbag when one or more sensors, not shown, sense the occurrence of a vehicle crash or
30 rollover requiring deployment of the airbag. The inflation gas enters the first inflation chamber 16

which is located at the inflation gas receiving section 26 of the airbag which is located in the first portion of the final folded length of the airbag. The first inflation chamber 16 begins to inflate, the
5 airbag breaks through the lateral side 72 of the backrest 70, and a substantial length of the longitudinal axis 14 of the airbag is disposed substantially perpendicular to the lateral side of the backrest. It should be noted that during this first
10 stage of airbag deployment very little, or no, inflation gas is in the second inflation chamber 18.

Fig. 11 is a schematic side elevation view of a vehicle seat 66 during a second stage of airbag deployment. As more inflation gas enters the first
15 inflation chamber 16 a substantial length of the longitudinal axis 14, especially the second portion of the final folded length of the airbag, which includes the smaller second inflation chamber 18, rotates towards the backrest 70.

Fig. 12 is a schematic side elevation view of a vehicle seat 66 during a third stage of airbag deployment. As inflation gas enters the second
20 inflation chamber 18, possibly due in part to the impact of a vehicle occupant's torso with the first inflation chamber 16, a substantial length of the longitudinal axis 14 of the airbag is disposed substantially parallel to said lateral side 72 of the
25 backrest 70 with the first inflation chamber 16 disposed vertically below said second inflation chamber 18. The flexible web 28 is disposed on a side
30 of the airbag that is distal from said backrest 70.

If the vehicle is equipped with a shoulder harness located where it will potentially interfere with an airbag located as shown in Fig. 12 at a side of the airbag opposite the flexible web 28 the exterior
5 surfaces of said first and second inflation chambers 16,18 are separated from one another by a void 32 as shown in Fig. 2 to allow the airbag to fit around the shoulder harness as it rotates towards the seat back during the second and third stages of airbag
10 deployment.

The deployment of an airbag into a space between a vehicle seat and a vehicle door, by the apparatus disclosed herein provides a cushioning effect to a vehicle occupant's thorax and head. The airbag
15 employed in the present invention has two inflation chambers which are connected by an open passageway. Inflation gas is introduced directly into only one of the inflation chambers, with the first inflation chamber being completely inflated before the second
20 inflation chamber is completely inflated. The lower inflation chamber, into which the inflation gas is introduced, will be struck first by the body of the sideways moving vehicle occupant, causing inflation gas to move into the upper inflation chamber as the
25 lower inflation chamber cushions the impact of the body with the vehicle interior. The vehicle occupant's head then strikes the fully inflated upper inflation chamber and the impact of the head with the vehicle interior is cushioned. Furthermore, the
30 invention disclosed herein cushions the vehicle occupant's thorax and head without interference from a

shoulder harness anchored to a structural pillar of the vehicle.

The preferred embodiments have been described, hereinabove. It will be apparent to those skilled in the art that the above methods may incorporate changes and modifications without departing from the general scope of this invention. It is intended to include all such modifications and alterations in so far as they come within the scope of the appended claims or the equivalents thereof.

CLAIMS:

1. An apparatus for protecting a vehicle occupant comprising:

5 (a) an inflatable airbag having a first inflation chamber which has a first volume and a second inflation chamber having a second volume which is less than said first volume, said first and second chambers communicating with one another via a passageway; and

10 (b) a source of inflation gas which provides inflation gas only into said first inflation chamber, said first inflation chamber being completely inflated before said second inflation chamber is completely inflated.

15 2. An apparatus for protecting a vehicle occupant according to Claim 1 wherein the ratio of said first volume to said second volume is in the range of about 10 to 6 to about 12 to 8.

20 3. An apparatus for protecting a vehicle occupant according to Claim 1 wherein the volume of the inflation gas provided by the source of inflation gas being a third volume, the sum of said first and second volumes being greater than said third volume.

25

4. An apparatus for protecting a vehicle occupant according to Claims 3 wherein said third volume is greater than said first volume.

30 5. An apparatus for protecting a vehicle occupant according to any of Claims 1 through 4 wherein an

exterior surface of the first inflation chamber is connected to an exterior surface of the second inflation chamber by a flexible web.

5 6. An apparatus for protecting a vehicle occupant according to Claim 5 wherein at a side of the airbag opposite said flexible web the exterior surfaces of said first and second inflation chambers are separated from one another by a void.

10

 7. An apparatus for protecting a vehicle occupant according to any of Claims 1 through 6 further comprising a vehicle seat having a seat cushion and a backrest, said airbag being incorporated in said
15 backrest and deployable through a lateral side of the backrest.

 8. An apparatus for protecting a vehicle occupant according to Claim 7 wherein the airbag has a
20 longitudinal axis extending through said first and second inflation chambers and:

 (i) during a first stage of airbag deployment a substantial length of the longitudinal axis of the airbag is disposed substantially perpendicular to said
25 lateral side of the backrest;

 (ii) during a second stage of airbag deployment a substantial length of the longitudinal axis of the airbag rotates towards the backrest; and

 (iii) during a third stage of airbag deployment a
30 substantial length of the longitudinal axis of the airbag is disposed substantially parallel to said

lateral side of the backrest with said first inflation chamber disposed vertically below said second inflation chamber.

5 9. An apparatus for protecting a vehicle occupant according to either of claims 5 or 6 further comprising a vehicle seat having a seat cushion and a backrest, said airbag being incorporated in said backrest and deployable through a lateral side of the
10 backrest, the airbag having a longitudinal axis extending through said first and second inflation chambers and:

(i) during a first stage of airbag deployment a substantial length of the longitudinal axis of the
15 airbag is disposed substantially perpendicular to said lateral side of the backrest;

(ii) during a second stage of airbag deployment a substantial length of the longitudinal axis of the airbag rotates towards the backrest; and

20 (iii) during a third stage of airbag deployment a substantial length of the longitudinal axis of the airbag is disposed substantially parallel to said lateral side of the backrest with said first inflation chamber disposed vertically below said second
25 inflation chamber and said flexible web disposed on a side of the airbag that is distal from said backrest.

10. An apparatus for protecting a vehicle occupant according to any of Claims 1 through 9
30 wherein the vehicle seat is incorporated into a vehicle with said lateral side of the backrest through

which the airbag is deployable being proximal to the lateral side of the vehicle.

1/7

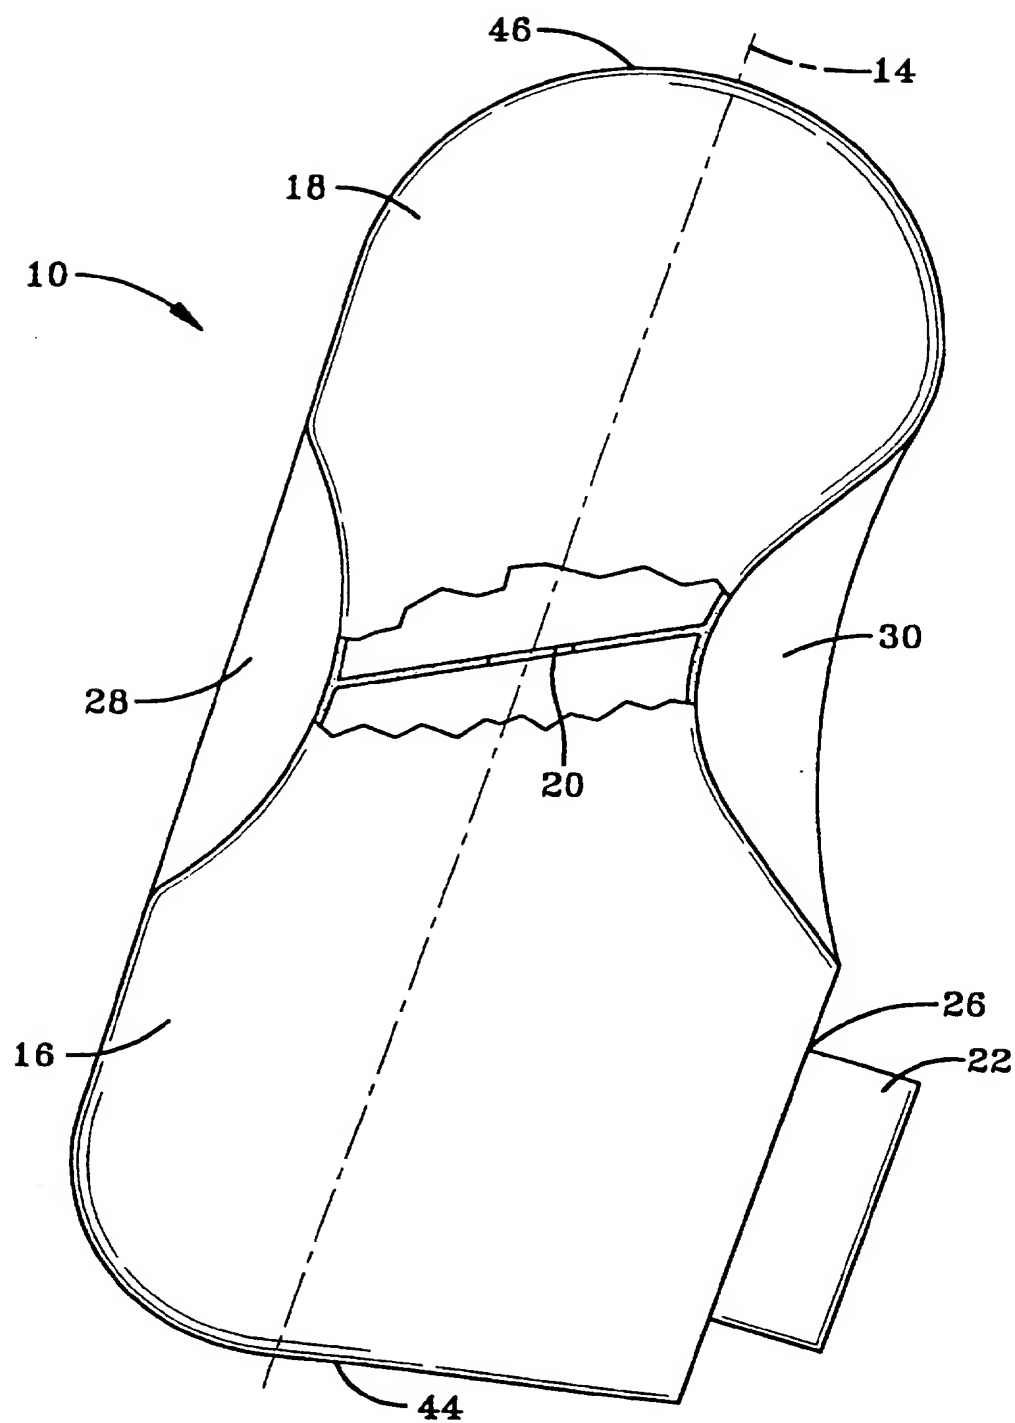


FIG-1

2/7

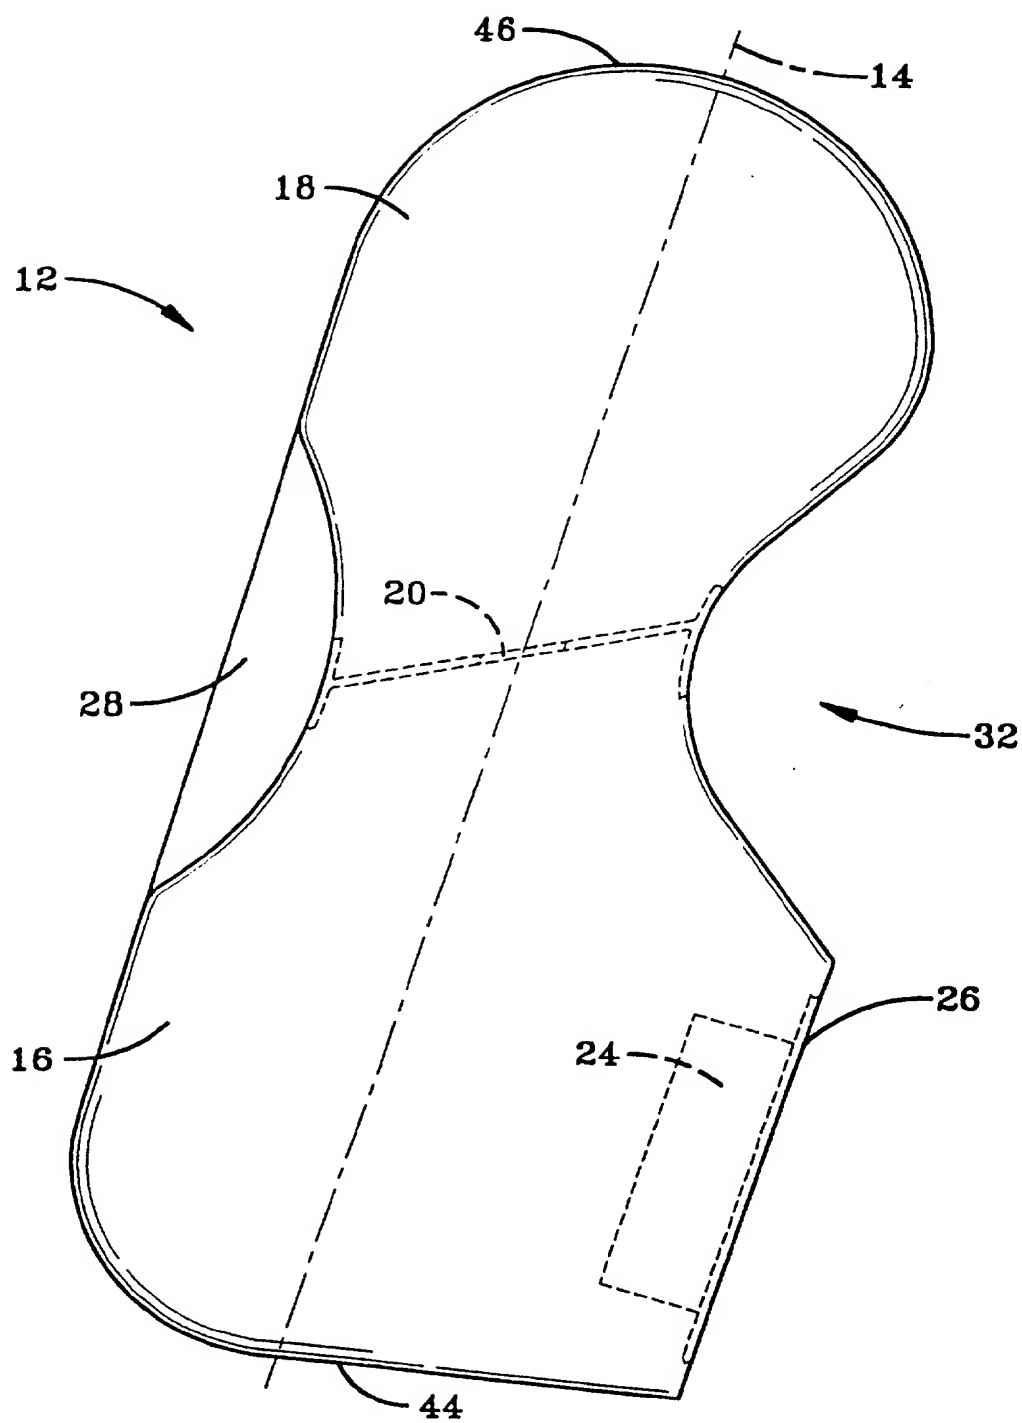


FIG-2

3/7

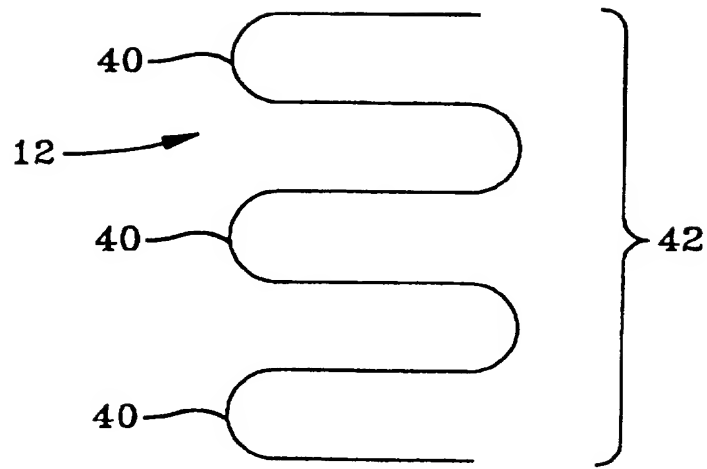


FIG-3

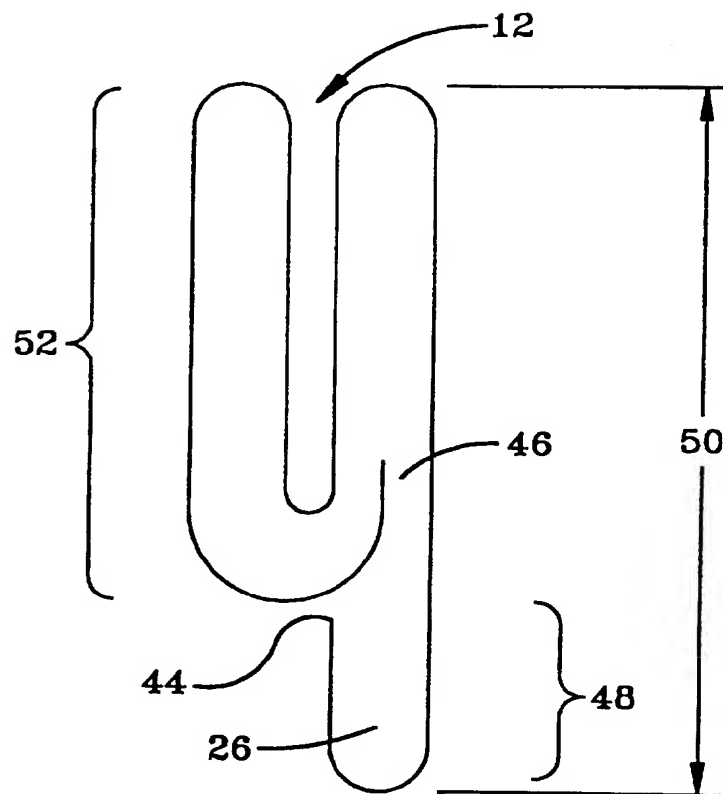


FIG-4

4/7

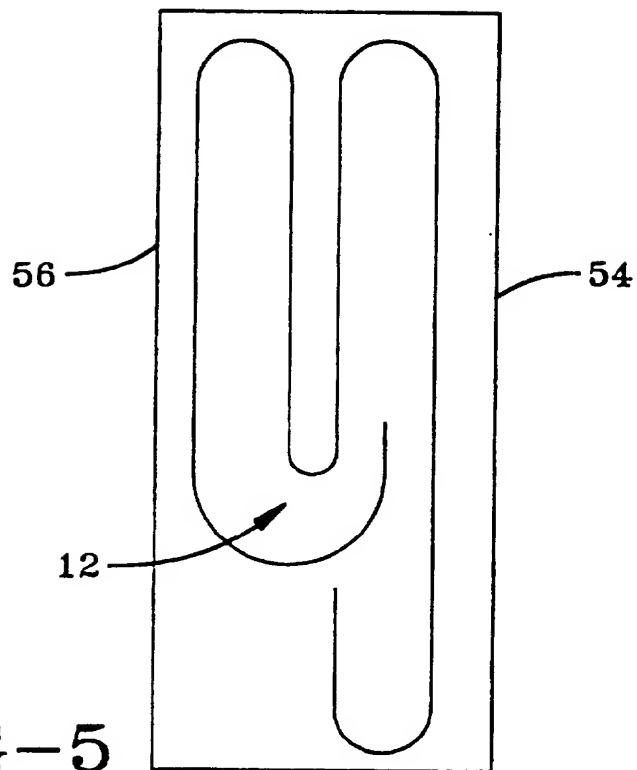


FIG-5



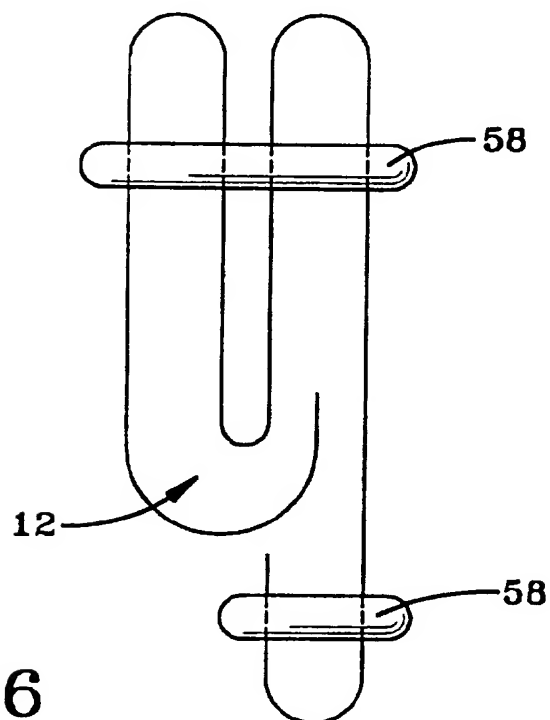


FIG-6

5/7

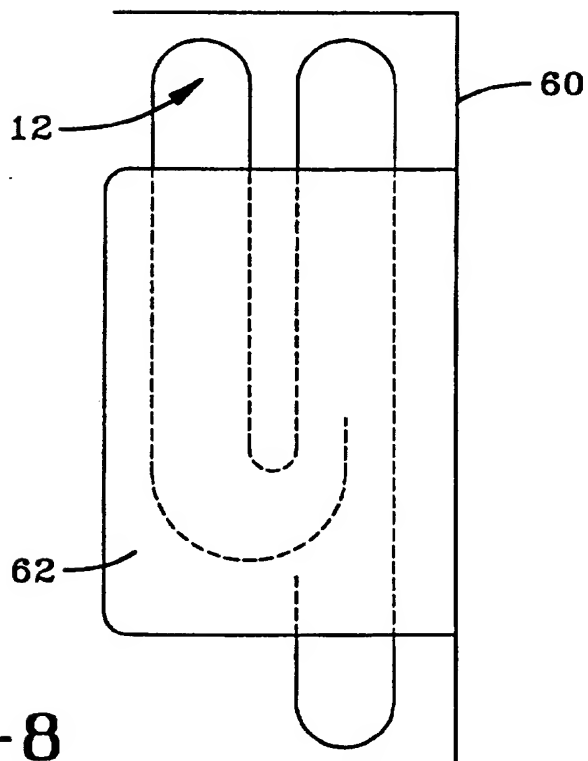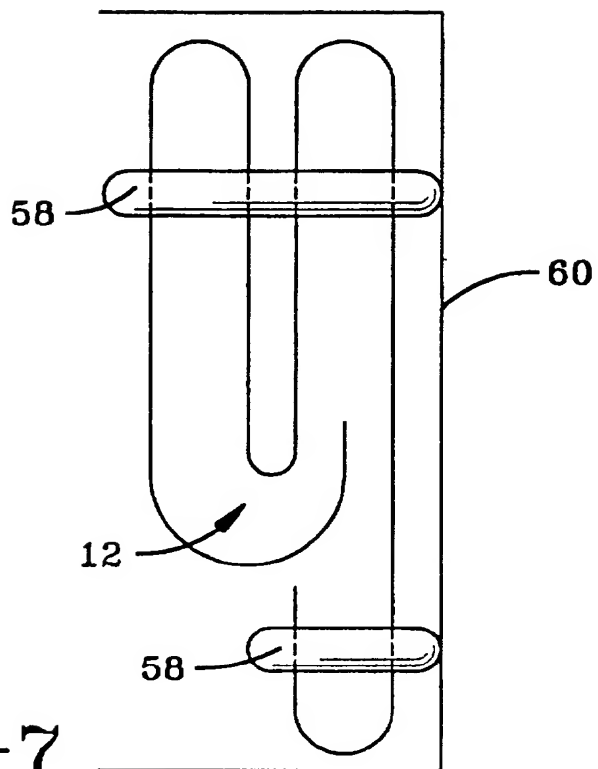

6/7

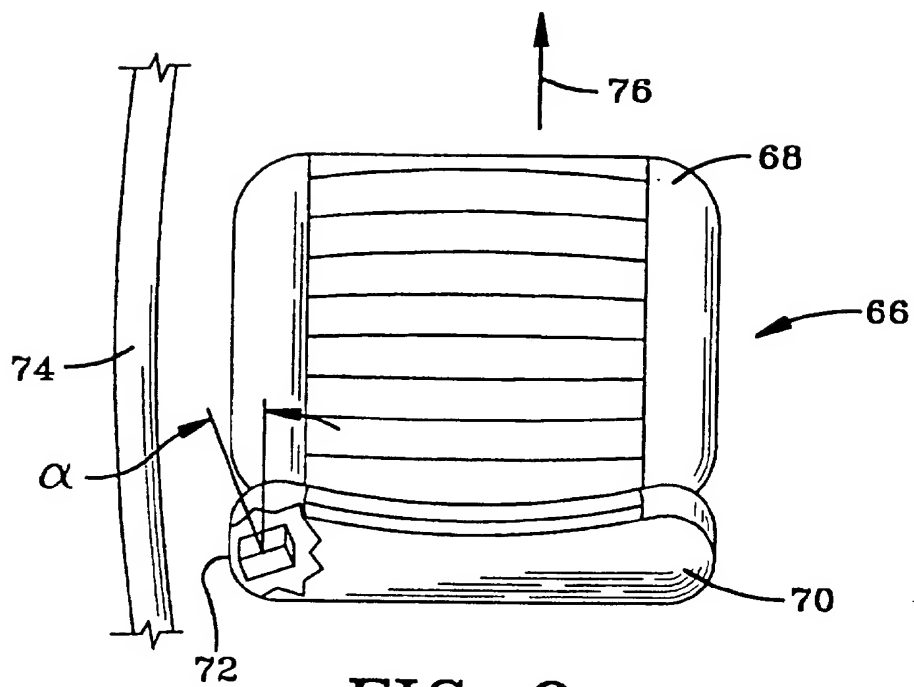


FIG-9



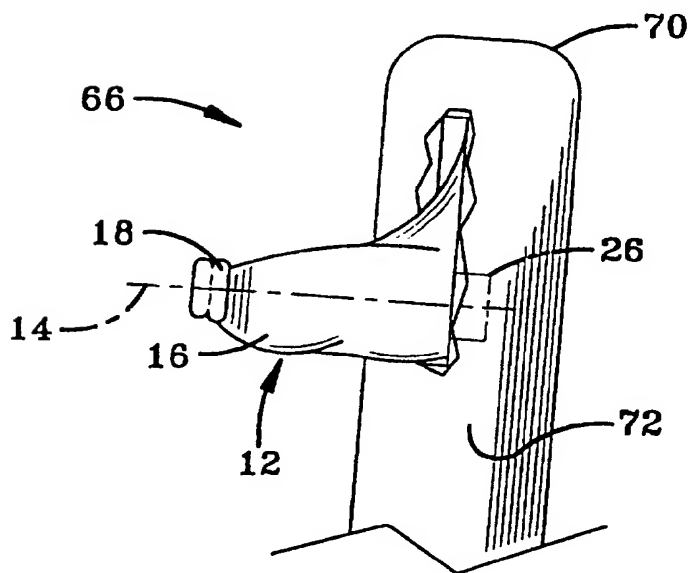


FIG-10

7/7

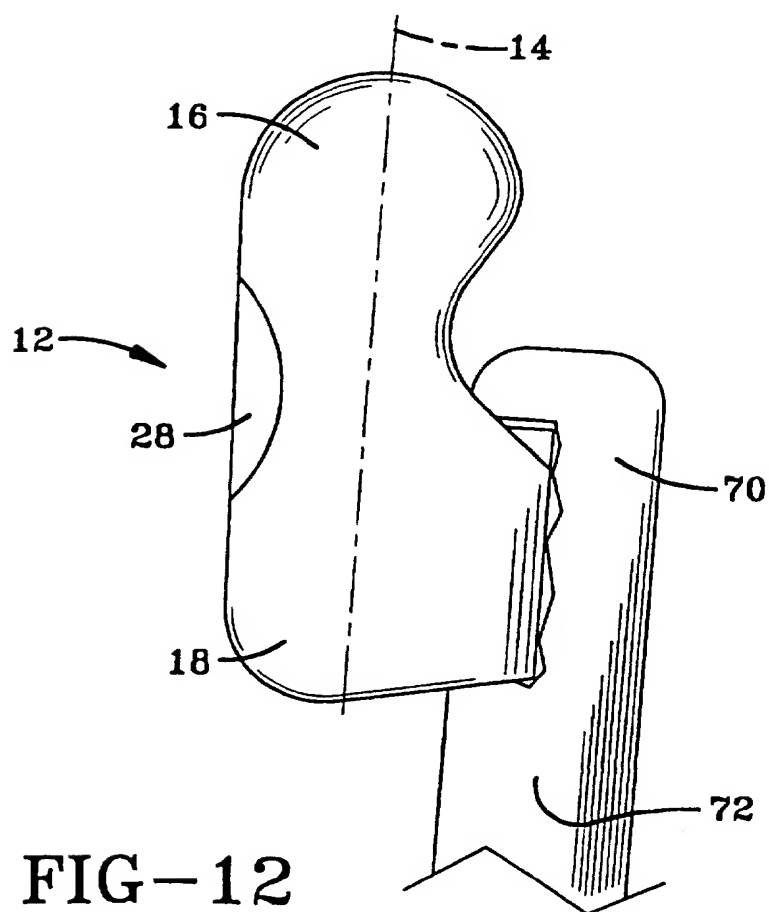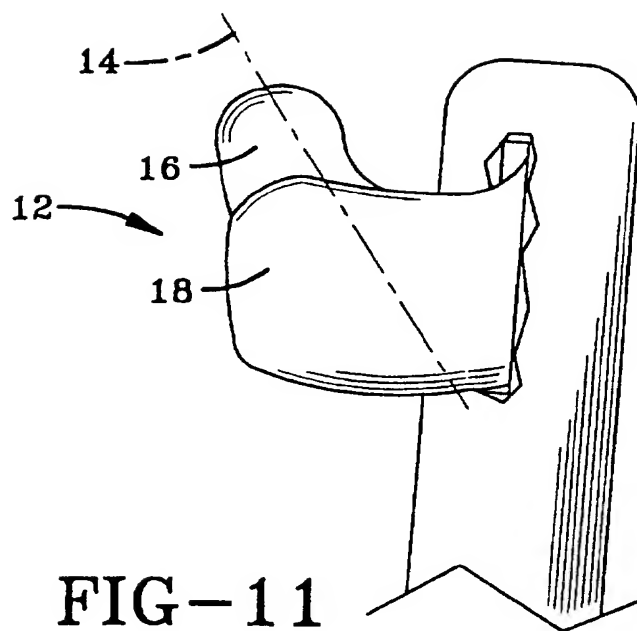

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16587

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B60R 21/24

US CL : 280/729

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 280/729, 730.1, 730.2, 742, 743.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,897,961 A (Leising et al.) 5 August 1975	NONE
A	US 4,169,613 A (Barnett) 2 October 1979	NONE
A	US 5,161,821 A (Curtis) 10 November 1992	NONE
A	US 5,333,899 A (Witte) 2 August 1994	NONE
A	US 5,524,924 A (Steffens, Jr. et al.) 11 June 1996	NONE



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 NOVEMBER 1997

Date of mailing of the international search report

24 NOV 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

KENNETH R. RICE

Telephone No. (703) 308-1113

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16587

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 7, 8, 9 and 10
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.